
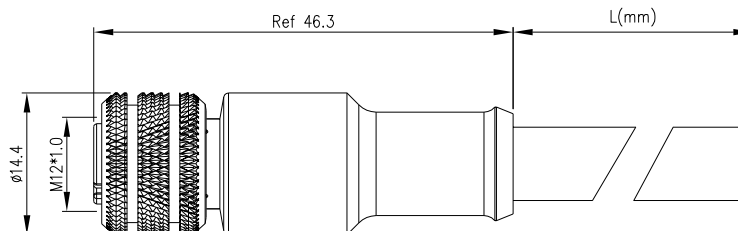






1. Rated voltage/Rated current:
3/4Pin A:250V/4A
5Pin A:60V/4A
6/8Pin A:30V/2A
4Pin D:250V/4A
5Pin B:60V/4A
2. Withstanding voltage:
3/4Pin A:AC1500V
5Pin:AC1200V
6/8Pin:650V
5Pin B:1120V
4Pin D:1500V
3. Contact resistance: $\leq 3\text{m}\Omega$
4. Levels of protection: IP67
5. Operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
6. Mechanical life: > 50
7. RoHS Compliance
8. Tolerance:
.X ± 0.3
.XX ± 0.1
Angles $\pm 1^{\circ}$



4Pin D coding		5Pin B coding	
			
		5	Grey
4	Black	4	Black
3	Blue	3	Blue
2	White	2	White
1	Brown	1	Brown
Conn.1	Wire Color	Conn.1	Wire Color

3Pin A coding		4Pin A coding		5Pin A coding		6Pin A coding		8Pin A coding	
									
								8	Red
								7	Blue
						6	Pink	6	Pink
				5	Grey	5	Grey	5	Gray
4	Black	4	Black	4	Black	4	Black	4	Yellow
3	Blue	3	Blue	3	Blue	3	Blue	3	Green
		2	White	2	White	2	White	2	Brown
1	Brown	1	Brown	1	Brown	1	Brown	1	White
Conn.1	Wire Color	Conn.1	Wire Color	Conn.1	Wire Color	Conn.1	Wire Color	Conn.1	Wire Color

— Cable length
01:1M
...
99:99M
The line grows business trip:
01~05m:±50mm
06~10m:±100mm
11~30m:±200mm
31~99m:±500mm

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	LZM	DATE	24.1.22	UNITS	MM	SHEET/OF		1/1
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE		NAME	ULO-CC03-M12X-XXP-FF-PMXX-SLXXX			
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO.	-		