FILE:	2021-D01\ULO

REV	E.C.N NO.	CONTENT	CHK	DATE

NOTES:
1.Rated voltage/Rated current:
3/4Pin A:250V/4A
5Pin A:60V/4A
6/8Pin A:30V/2A
4Pin D:250V/4A
5Pin B:60V/4A
2.Withstanding voltage:
3/4Pin A:AC1500V
5Pin:AC1200V
6/8Pin:650V
5Pin B:1120V
4Pin D:1500V
3.Contact resistance：≤3mΩ
4.Levels of protection: IP67
5.Operating temperatureture:-40˚C~+85˚C
6.Mechanical life：＞50
7.RoHS Compliance
8.Tolerance:
.X ±0.3
.XX ±0.1
Angles ±1°

4Pin D coding



5Pin B coding





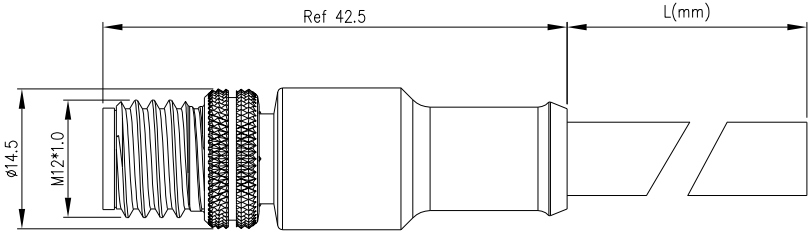

		5	Grey
4	Black	4	Black
3	Blue	3	Blue
2	White	2	White
1	Brown	1	Brown
Conn.1	Wire Color	Conn.1	Wire Color

3Pin A coding



4Pin A coding



5Pin A coding



6Pin A coding



8Pin A coding



								8	Red
								7	Blue
						6	Pink	6	Pink
				5	Grey	5	Grey	5	Gray
4	Black	4	Black	4	Black	4	Black	4	Yellow
3	Blue	3	Blue	3	Blue	3	Blue	3	Green
		2	White	2	White	2	White	2	Brown
1	Brown	1	Brown	1	Brown	1	Brown	1	White
Conn.1	Wire Color	Conn.1	Wire Color	Conn.1	Wire Color	Conn.1	Wire Color	Conn.1	Wire Color

ULO-CC03-M12X-XXP-MM-PMXX-SLXXX

Coding:
A:A-Coding
B:B-Coding
D:D-Coding

Pin: 03, 04,
05, 06, 08

SH:Shielded(屏蔽)
无:Unshielded(不屏蔽)

Cable jacket:
A:PVC UL2517
B:PUR UL20549

Cable length
01:1M
…
99:99M
The line grows business trip:
01~05m:±50mm
06~10m:±100mm
11~30m:±200mm
31~99m:±500mm

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE
DWG.	LZM	DATE	24.1.22	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1:1	A4	
APP.		DATE		NAME	ULO-CC03-M12X-XXP-MM-PMXX-SLXXX		
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司				DWGNO.			