
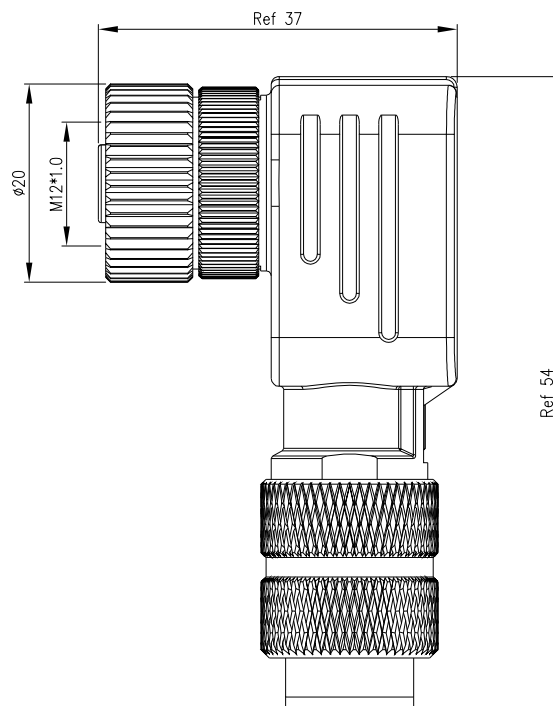


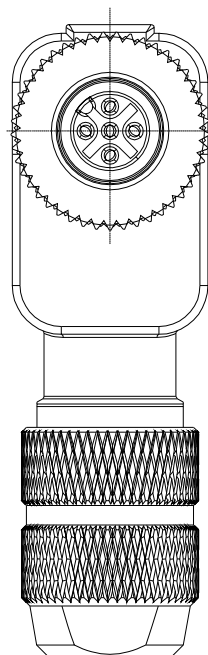

NOTES:

1. Rated voltage/Rated current:

3/4Pin A: 250V/4A

5Pin A: 60V/4A

6/8Pin A: 30V/2A

4Pin D: 250V/4A

5Pin B: 60V/4A

2. Withstanding voltage:

3/4Pin A: AC1500V

5Pin: AC1200V

6/8Pin: 650V

5Pin B: 1120V

4Pin D: 1500V

3. Contact resistance: $\leq 3m\Omega$

4. Levels of protection: IP67

5. Operating temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 6. Mechanical life: > 50

7. RoHS Compliance


8. Tolerance:

.X ± 0.3 .XX ± 0.1 Angles $\pm 1^{\circ}$


ULO-CC03-M12X-XXP-FF-PXSH-SR00X

Coding:
A: A-Coding
B: B-CodingPin: 03, 04
05, 06, 08A: 组装式焊接 (Solder)
S: 塑胶螺母组装式焊接
(Solder)
B: 组装式锁螺钉 (Screw)
W: 塑胶螺母组装式锁螺
钉 (Screw)001: 4.5-6.0mm
002: 6.0-7.5mm
003: 6.5-10.0mm


4Pin D coding




5Pin B coding




3Pin A coding




4Pin A coding




5Pin A coding



6Pin A coding



8Pin A coding



ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZM	DATE	24.1.23	UNITS	MM
CHK.		DATE		SCALE	1:1
APP.		DATE			
	NAME		ULO-CC03-M12X-XXP-FF-PXSH-SR00X		
	DWGNO				