

NOTES:

1.Rated voltage/Rated current:

3/4Pin A:250V/4A

5Pin A:60V/4A

6/8Pin A:30V/2A

4Pin D:250V/4A

5Pin B:60V/4A

2.Withstanding voltage:

3/4Pin A:AC1500V

5Pin:AC1200V

6/8Pin:650V

5Pin B:1120V

4Pin D:1500V

3.Contact resistance: $\leq 3m\Omega$


4.Levels of protection: IP67

5.Operating temperature:-40℃~+85℃

6.Mechanical life: >50

7.RoHS Compliance

8.Tolerance:

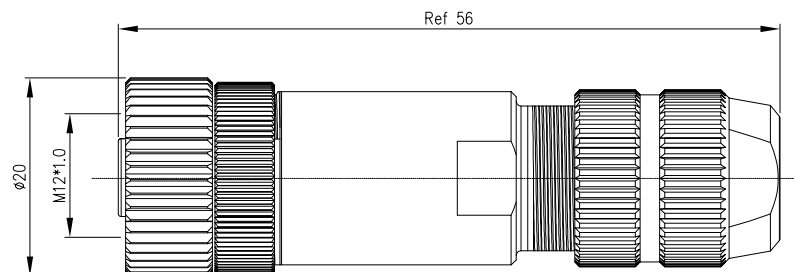.X ± 0.3 .XX ± 0.1 Angles $\pm 1^\circ$ 

ULO-CC03-M12X-XXP-FF-PXSH-SL00X

Coding:

A:A-Coding

B:B-Coding

Pin: 03, 04

05, 06, 08

A:组装式焊接(Solder)

S: 塑胶螺母组装式焊接(Solder)

B: 组装式锁螺钉 (Screw)


W: 塑胶螺母组装式锁螺钉 (Screw)

001:4.5-6.0mm


002:6.0-7.5mm

003:6.5-10.0mm


4Pin D coding




5Pin B coding




3Pin A coding




4Pin A coding




5Pin A coding



6Pin A coding



8Pin A coding



ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	LZM	DATE	24.1.23	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE						
 NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					NAME	ULO-CC03-M12X-XXP-FF-PXSH-SL00X		
					DWGNO			