

FILE: 2021-D01VULO

5


4

3

2

1

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

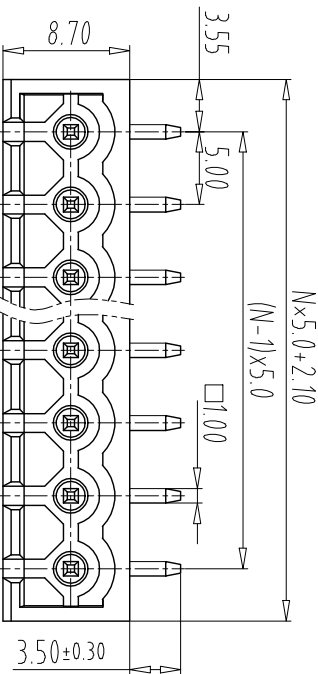


NOTES1:
UL Standard

1. Use group B C D
Rated Current 15A — 10A
Rated Voltage 300V — 300V

IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	400V
Rate Current(A)	15A

NOTES2:
1.Housing: PA66(UL94V-0)
2.Solder Pin: Brass(5n Plated)

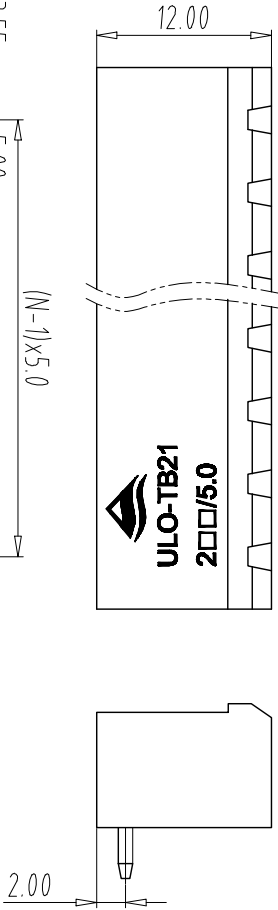

NOTES3:
1.Pitch: 5.0mm Poles: 02-24P
2.Operating temperature: -40℃~+105℃
3.RoHS Compliance

How to order
ULO-TB21 - 2RC/5.0 - XXP - Y 0 0 0 A
Certificate Factory poles
Series NO. Code

Customer requirements
color:
1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:white
5:Orange

PCB Layout

Total Pitch Tolerances												Nominal dimension range												T	≡	—	//
in mm												in mm															
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over		
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	0	100	over	over			
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all	to	to	to			
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	10	100	100	150	150	150			
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5			

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.28	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	ULO-TB21-2RC/5.0-XXP-Y000A		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.	UL0TB21Y000A	