


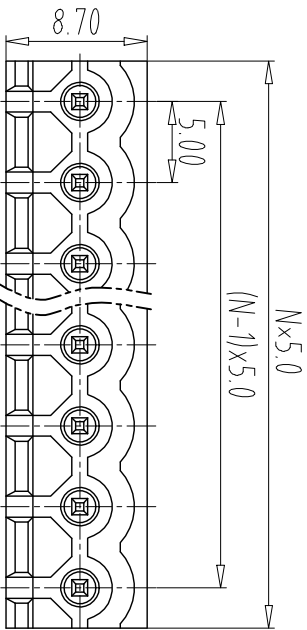

NOTES1:

UL Standard

1	Use group	B	C	D
	Rated Current	15A	-	10A
	Rated Voltage	300V	-	300V

IEC Standard

1	Pollution Degree	2
	Overvoltage Category	II
	Rate Impulse Voltage(kV)	4.0kV
	Rate Voltage(V)	320V
	Rate Current(A)	20A

NOTES2:

1.Housing: PA66(UL94V-0)

2.Solder Pin: Brass(Sn Plated)

NOTES3:

1.Pitch: 5.0mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

ULO-TB21 - 2V/5.0 - XXP - Y 0 0 0 A

Certificate Factory poles

Series NO. Code

Customer requirements

color:

1:Grey 6:Red

2:Blue 7:transparent

3:Black 8:Yellow

4:Green 9:White

5:Orange

PCB Layout

Total Pitch Tolerances										Nominal dimension range										⊥	=	—	//	
in mm										in mm														
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over					
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over					
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	all					
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	10	100					
±0.18 ±0.20 ±0.25 ±0.3 ±0.35 ±0.44 ±0.55 ±0.70 ±0.75										±0.20 ±0.25 ±0.30 ±0.35 ±0.44 ±0.55 ±0.70 ±0.80 ±0.90										0.2	0.3	0.2	0.3	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.27	UNITS	MM
CHK.	DATE	SCALE	1 : 1	SHEET/OF	1/1
APP.	DATE	NAME	ULO-TB21-2V/5.0-XXP-Y000A		
NINGBO ULO ELECTRONICS CO.,LTD.			DWGNO.	UL0TB21Y000A	