
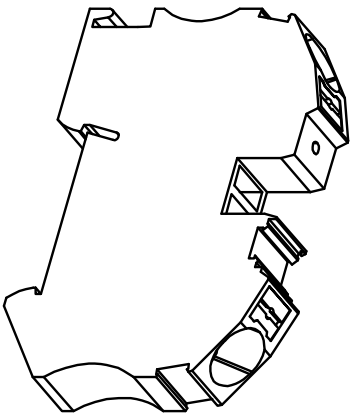
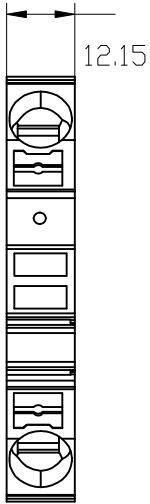
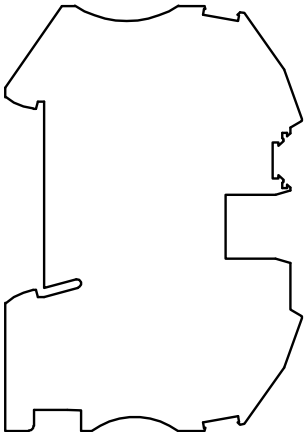

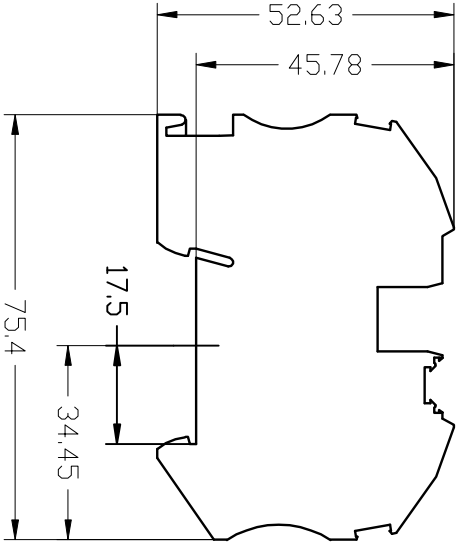


REV	E.C.N NO	CONTENT	CHK	DATE



Technical data:

Product properties

1. Product type: Feed-through terminal block

2. Number of connections: 2

3. Number of rows: 1

4. Potentials: 1

Electrical properties

1. Nominal voltage: 1000V

2. Rated surge voltage: 8KV

3. Nominal current: 76A

4. Maximum load current: 85A

5. Nominal cross section: 16mm²

6. Overvoltage category: III

7. Degree of pollution: 3

8. Operating temperature range: -60℃~+110℃

Connection data

1. Conductor cross section rigid: 0.5mm²-25mm²

2. Cross section AWG: 20-4

3. Conductor cross section flexible: 0.5mm²-25mm²

4. Conductor cross section, flexible AWG: 20-4

5. Stripping length: 18mm-20mm

2	UL0-TB188-PT 16N BU	Blue
1	UL0-TB188-PT 16N	Gray
ITEM	NAME OF PART	Color
Total Pitch Tolerances		
in mm		
over	over	over
0	30	53
to	to	to
30	53	70
to	to	to
53	70	90
to	to	to
70	90	115
to	to	to
90	115	150
to	to	to
115	150	200
to	to	to
150	200	250
to	to	to
200	250	320
to	to	to
250	320	30
to	to	to
320	30	53
to	to	to
30	53	70
to	to	to
53	70	90
to	to	to
70	90	115
to	to	to
90	115	150
to	to	to
115	150	200
to	to	to
150	200	250
to	to	to
200	250	320
to	to	to
250	320	10
to	to	to
320	10	10
to	to	to
10	10	all
to	to	to
10	all	100
to	to	to
100	100	150
to	to	to
150	150	0.5
to	to	to
0.5	0.5	0.5

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.112	UNITS	MM
CHK.	DATE	SCALE	1:1	SHEET/OF	1/1
APP.	DATE	NAME	UL0-TB188-PT16N-XX		
NINGBO UL0 ELECTRONICS CO.,LTD.					
宁波欧路电子有限公司					
NINGBO UL0 ELECTRONICS CO.,LTD.					
宁波欧路电子有限公司					