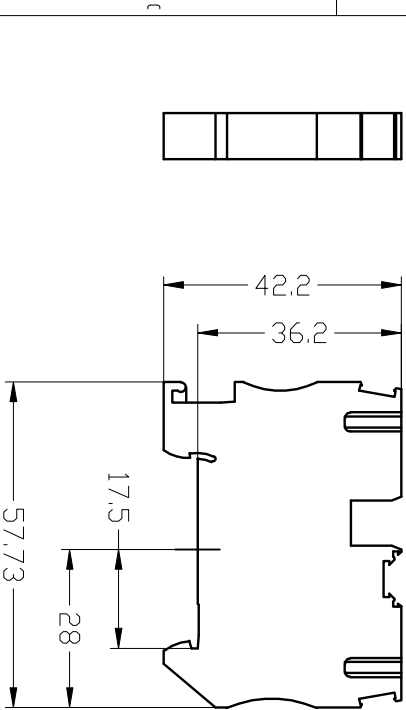


Technical data:

Product properties



- Product type: Feed-through terminal block
- Number of connections: 2
- Number of rows: 1
- Potentials: 1

Electrical properties

- Nominal voltage: 1000V
- Rated surge voltage: 8KV
- Nominal current: 41A
- Maximum load current: 52A
- Nominal cross section: 6mm²
- Overvoltage category: III
- Degree of pollution: 3
- Operating temperature range: -60℃~+110℃

Connection data

- Conductor cross section rigid: 0.5mm²-10mm²
- Cross section AWG: 20-8
- Conductor cross section flexible: 0.5mm²-10mm²
- Conductor cross section, flexible AWG: 20-8
- Stripping length: 10mm-12mm

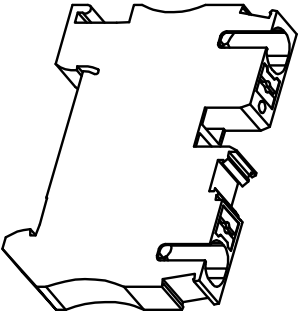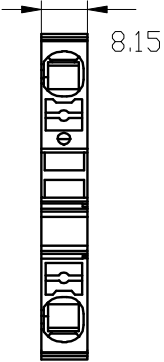

2	UL0-TB184-PT 6 BU	Blue
1	UL0-TB184-PT 6	Gray

ITEM	NAME OF PART	Color
------	--------------	-------

Told Pitch Tolerances		Nominal dimension range															—	//
		in mm																

0	over	30	over	53	over	70	over	90	over	115	over	150	over	200	over	250	0	over
30	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	0	over
53	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	100	over
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.5
6																		

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	UNITS	MM
CHK.		DATE		SCALE	1 : 1
APP.		DATE		NAME	UL0-TB184-PT6-XX



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司

DWGNO.

UL0-TB184-PT6-XX