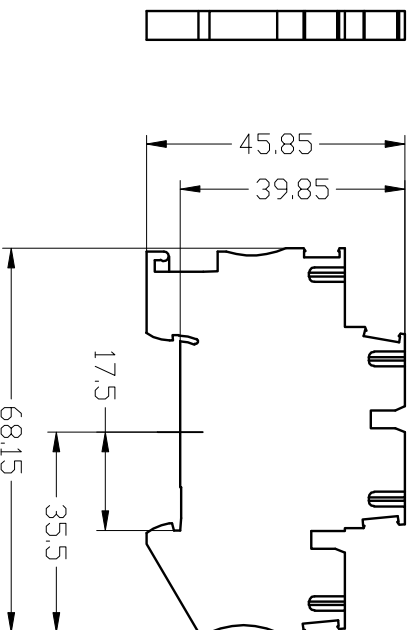


Technical data:

Product properties

1. Product type: Multi-level terminal block

2. Number of connections: 4

3. Number of rows: 2

4. Potentials: 2

Electrical properties

1. Nominal voltage: 500V

2. Rated surge voltage: 6KV

3. Nominal current: 22A

4. Maximum load current: 26A

5. Nominal cross section: 2.5mm²

6. Overvoltage category: III

7. Degree of pollution: 3

8. Operating temperature range: $-60^{\circ}\text{C} \sim +110^{\circ}\text{C}$

Connection data

1. Conductor cross section rigid: $0.14\text{mm}^2-4\text{mm}^2$

2. Cross section AWG: 26-12

3. Conductor cross section flexible: 0.14mm²-4mm²

4. Conductor cross section, flexible AWG: 26-12

5. Stripping length: 8mm-10mm

2	UL0-TB168-PTTB 2.5 BU	Blue
1	UL0-TB168-PTTB 2.5	Gray

Total Pitch Tolerances in mm	Nominal dimension range in mm	Tolerance
		—
		±
		+
		-

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	SWL	DATE	24.1.12	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1 : 1	A4 
APP.		DATE		NAME		
NINGBO ULIO ELECTRONICS CO.,LTD.				UL0-1B168-PTB2.5-XX		