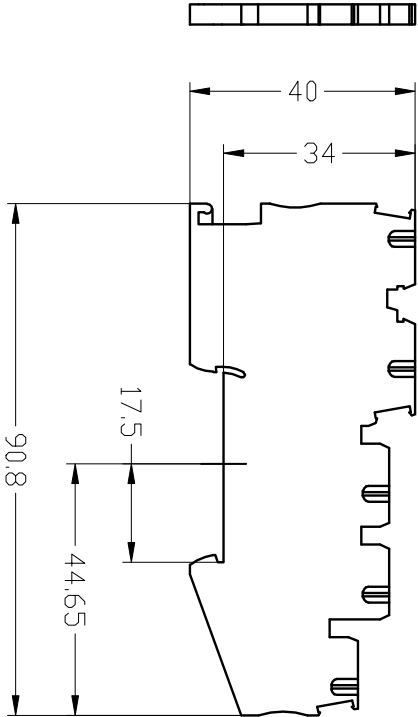


Technical data:

Product properties



- 1. Product type: Sensor/actuator terminal block
- 2. Number of connections: 5
- 3. Number of rows: 4
- 4. Potentials: 4

Electrical properties

- 1. Nominal voltage: 250V
- 2. Rated surge voltage: 4kV
- 3. Nominal current: 13.5A
- 4. Maximum load current: 13.5A
- 5. Nominal cross section: 1.5mm²
- 6. Overvoltage category: III
- 7. Degree of pollution: 3
- 8. Operating temperature range: /

Connection data

- 1. Conductor cross section rigid: 0.14mm²-1.5mm²
- 2. Cross section AWG: 26-16
- 3. Conductor cross section flexible: 0.14mm²-1.5mm²
- 4. Conductor cross section, flexible AWG: 26-16
- 5. Stripping length: 8mm-10mm

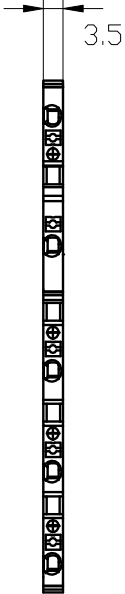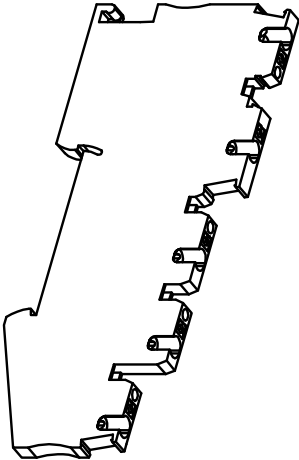

Total Pitch Tolerances										Nominal dimension range										+	±	-	//
in mm										in mm													
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	30	30	53	70	90	115	150	200	250	30	53	70	90	115	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	30	30	53	70	90	115	150	200	250	30	53	70	90	115	150	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5
6										5										4			

ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	SWL	DATE	24.1.11	UNITS	MM	SHEET/OF	1 / 1	
CHK.		DATE		SCALE	1 : 1	A4		
APP.		DATE		NAME	ULO-TB164-PT1015/S/4			
								
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司								
				DWGNO.	1			
				2				