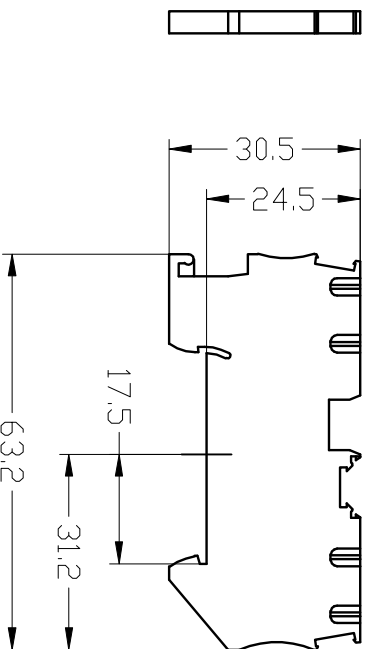


Technical data:

Product properties



1. Product type: Multi-conductor terminal block
2. Number of connections: 4
3. Number of rows: 1
4. Potentials: 1

Electrical properties

1. Nominal voltage: 500V
2. Rated surge voltage: 6kV
3. Nominal current: 17.5A
4. Maximum load current: 17.5A
5. Nominal cross section: 1.5mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: -60°C~+110°C

Connection data

1. Conductor cross section rigid: 0.14mm^2 -1, 5mm^2
2. Cross section AWG: 26-16
3. Conductor cross section flexible: 0.14mm^2 -1, 5mm^2
4. Conductor cross section, flexible AWG: 26-16
5. Stripping length: 8mm - 10mm

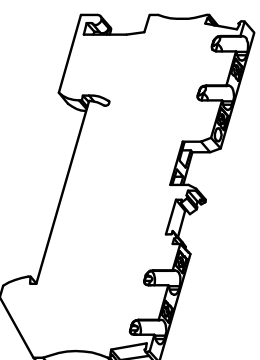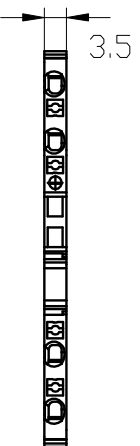

2	ULO-TB160-PT 1.5/S-QUATTRO BU	Blue
1	ULO-TB160-PT 1.5/S-QUATTRO	Gray

Total Pitch Tolerances in mm	Nominal dimension range in mm	Tolerance
		—
		≡
		⊥

[illegible]

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE
DWG.	SWL	DATE	24.1.11	UNITS	MM	SHEET/OF 1/1
CHK.		DATE		SCALE	1 : 1	A4 
APP.		DATE				
				NAME		