

REV	E.C.N NO.	CONTENT	CHK	DATE

Technical data:

Product properties







- Product type:Ground terminal block
- Number of connections: 1
- Number of rows: 2
- Potentials: 1

Electrical properties

- Nominal voltage: /
- Rated surge voltage: 8KV
- Nominal current: /
- Maximum load current: /
- Nominal cross section: 10mm²
- Overvoltage category: III
- Degree of pollution: 3
- Operating temperature range: -60℃~+110℃

Connection data

- Conductor cross section rigid: 0.5mm²-16mm²
- Cross section AWG: 20-6
- Conductor cross section flexible: 0.5mm²-10mm²
- Conductor cross section, flexible AWG: 20-8
- Stripping length: 10mm

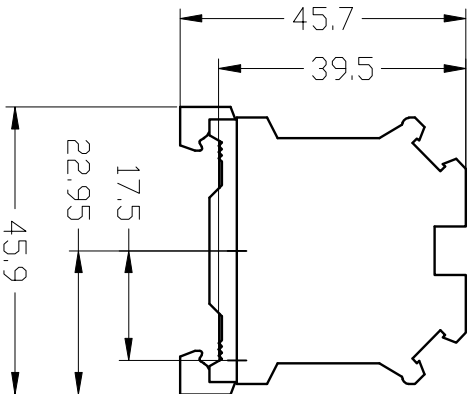

Total Pitch Tolerances												Nominal dimension range												T		≡		—		//		
in mm												in mm																				
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200	250	320	30	53	70	90	115
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	0.3	0.2	0.3	
6												5												4		4		4				

	M	NAME OF PART	NO. OF PART		Q'TY	MATERIAL		NOTE	
	G.	SWL	DATE	24.1.12	UNITS	MM	SHEET/OF	1/1	
	K.		DATE		SCALE	1 : 1	A4		
	P.		DATE		NAME	ULO-TB365-USLKG10N			
NINGBO ULO ELECTRONICS CO.,LTD. 宁波欧路电子有限公司					DWGNO.				