
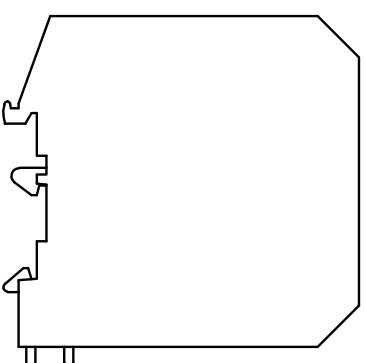





Technical data:

Product properties



- 1.Product type:High current terminal block
- 2.Number of positions: 1
- 3.Number of connections: 2
- 4.Number of rows: 1
- 5.Potentials: 1

Electrical properties

1. Nominal voltage: 1000V
2. Rated surge voltage: 8KV
3. Nominal current: 150A
4. Maximum load current: 150A
5. Nominal cross section: 50mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: -60℃~+110℃

Connection data

1. Conductor cross section rigid: 16mm^2 - 70mm^2
2. Cross section AWG: 4-2/0
3. Conductor cross section flexible: 25mm^2 - 70mm^2
4. Conductor cross section, flexible AWG: 2-2
5. Stripping length: 24mm

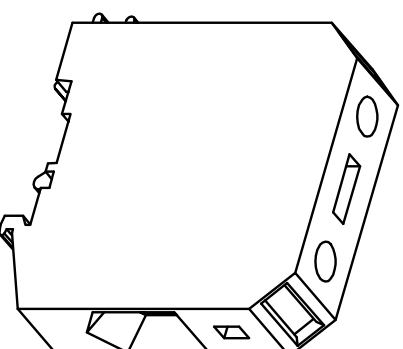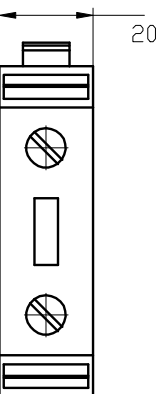

2	ULO-TB340-UKH 50 BU	Blue
---	---------------------	------

1	UL0-TB340-UKH 50	Gray
---	------------------	------

ITEM	NAME OF PART	Color
------	--------------	-------

[illegible]Nominal dimension range
in mm

T		—	//
---	--	---	----

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	MM	SHEET/OF 1/1

CHK.	DATE	SCALE	1 : 1	A4	
------	------	-------	-------	----	---

APP.	DATE		IN A TEND A INKIFA VV

NINGBO ULO ELECTRONICS CO.,LTD.	NAME	ULO-1B340-UKH50-XX
---------------------------------	------	--------------------