

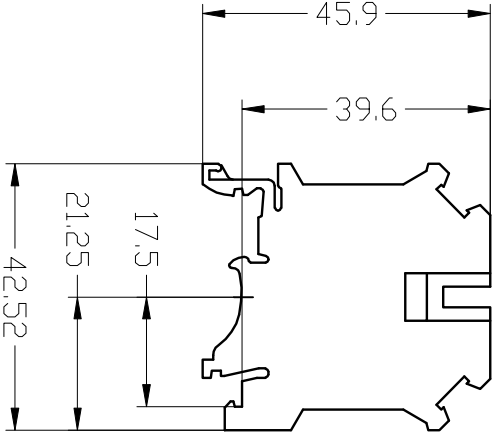


6		5		4		3		2		1	
FILE: 2106.03											
REV		E.C.N NO.		CONTENT		CHK		DATE			



Technical data:

Product properties



- 1.Product type:Installation terminal block
- 2.Number of connections: 2
- 3.Number of rows: 1
- 4.Potentials: 1

Electrical properties

- 1.Nominal voltage: 400V
- 2.Rated surge voltage: 6KV
- 3.Nominal current: 76A
- 4.Maximum load current: 101A
- 5.Nominal cross section: 16mm²
- 6.Overvoltage category: III
- 7.Degree of pollution: 3
- 8.Operating temperature range: /

Connection data

- 1.Conductor cross section rigid: 2.5mm²-25mm²
- 2.Cross section AWG: 12-4
- 3.Conductor cross section flexible: 4mm²-16mm²
- 4.Conductor cross section, flexible AWG: 10-6
- 5.Stripping length: 11mm

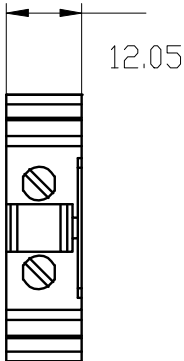

2	UL0-TB338-UK 16 BU		Blue
1	UL0-TB338-UK 16		Gray
ITEM	NAME OF PART	Color	

Told Pitch Tolerances															
in mm															
ver	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200
0.18±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80
6						5						4			

ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL		NOTE			
DWG.	SWL		DATE		24.1.12		UNITS		MM	SHEET/OF	1/1
CHK.	DATE		SCALE		1 : 1		A4				
APP.	DATE		NAME		UL0-TB338-UK16-XX						
NINGBO UL0 ELECTRONICS CO.,LTD.					DWGNO.						
 宁波联路电子有限公司					1						
2											



NINGBO UL0 ELECTRONICS CO.,LTD.

宁波欧路电子有限公司