

Technical data:

Product properties



1. Product type: Feed-through terminal block
2. Number of connections: 2
3. Number of rows: 1
4. Potentials: 1

Electrical properties

1. Nominal voltage: 800V
2. Rated surge voltage: 8kV
3. Nominal current: 76A
4. Maximum load current: 101A
5. Nominal cross section: 16mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: -60℃~+110℃

Connection data

1. Conductor cross section rigid: 2.5mm²-25mm²
2. Cross section AWG: 12-4
3. Conductor cross section flexible: 4mm²-16mm²
4. Conductor cross section, flexible AWG: 10-6
5. Stripping length: 11mm

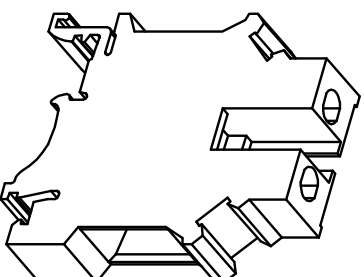

2	ULO-TB336-UK 16 N BU	Blue
---	----------------------	------

ITEM	NAME OF PART	Color
------	--------------	-------

[illegible][illegible]

Nominal dimension range in mm	T	$\bar{\bar{=}}$	-	//
----------------------------------	---	-----------------	---	----

[illegible]

2		1	
REV	E.C.N. NO.	CONTENT	CHK DATE

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	UNITS	MM
CHK.		DATE		SCALE	1 : 1
APP.		DATE			A4
					

MINGBO ULO ELECTRONICS CO.,LTD.

ULO-1B336-UK16N-XX



NINGBO ULO ELECTRONICS CO., LTD.
宁波欧路电子有限公司

宁波市欧波电子有限公司