
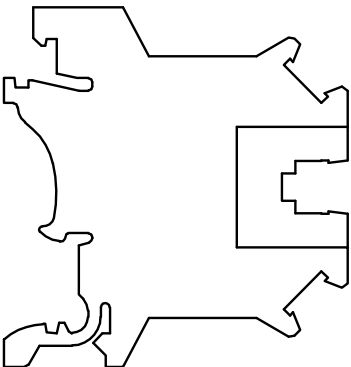



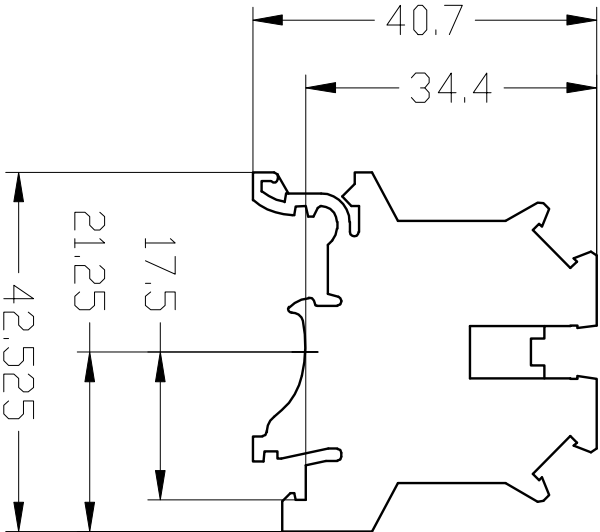

Technical data:

Product properties



- Product type:Feed-through terminal block
- Number of connections: 2
- Number of rows: 1
- Potentials: 1

Electrical properties

- Nominal voltage: 690V
- Rated surge voltage: 8KV
- Nominal current: 24A
- Maximum load current: /
- Nominal cross section: 2.5mm²
- Overvoltage category: III
- Degree of pollution: 3
- Operating temperature range: -60℃~+110℃

Connection data

- Conductor cross section rigid: 0.2mm²-4mm²
- Cross section AWG: 24-12
- Conductor cross section flexible: 0.2mm²-2.5mm²
- Conductor cross section, flexible AWG: 24-14
- Stripping length: 7mm

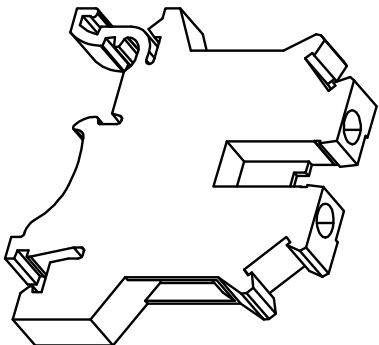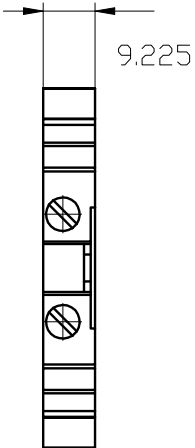

2	UL0-TB331-UK 2.5B BU	Blue
---	----------------------	------

1	UL0-TB331-UK 2.5B	Gray
---	-------------------	------

ITEM	NAME OF PART	Color
------	--------------	-------

Told Pitch Tolerances	
in mm	

Nominal dimension range															
in mm															

over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115	150	200
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70
6									5						

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	S.W.L	DATE	24.1.12	UNITS	MM
CHK.	DATE		SCALE	1:1	A4
APP.	DATE		NAME	UL0-TB331-UK2.5B-XX	1/1



NINGBO ULO ELECTRONICS CO.,LTD.

宁波欧路电子有限公司

DWGNO.