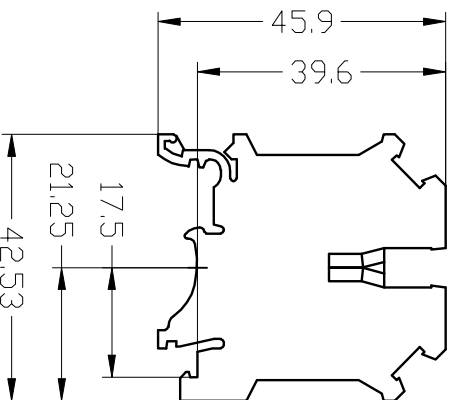


Technical data:

Product properties



1. Product type: Feed-through terminal block
2. Number of connections: 2
3. Number of rows: 1
4. Potentials: 1

Electrical properties

1. Nominal voltage: 800V
2. Rated surge voltage: 8kV
3. Nominal current: 24A
4. Maximum load current: 32A
5. Nominal cross section: 2.5mm²
6. Overvoltage category: III
7. Degree of pollution: 3
8. Operating temperature range: -60℃~+110℃

Connection data

1. Conductor cross section rigid: 0.2mm^2 – 4mm^2
2. Cross section AWG: 24–12
3. Conductor cross section flexible: 0.2mm^2 – 2.5mm^2
4. Conductor cross section, flexible AWG: 24–14
5. Stripping length: 8mm



2	UL0-1B332-UK 3 N BU	Blue
1	UL0-1B332-UK 3 N	Gray
ITEM	NAME OF PART	Color

A	
Total Pitch Tolerances in mm	Nominal dimension range in mm
	T ± — //

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG.	SWL	DATE	24.1.12	UNITS	MM
CHK.	DATE	SCALE	1 : 1	A4	
APP.	DATE				