
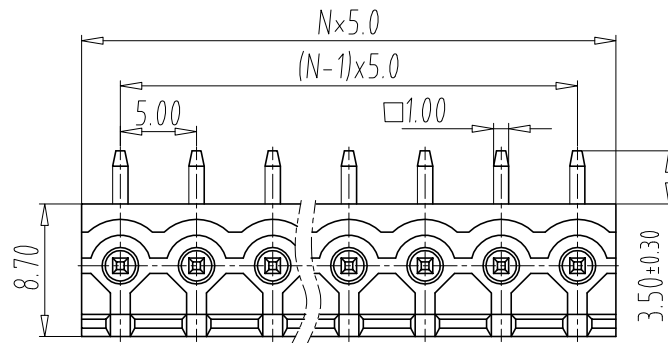


PCB Layout



NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	15A	—	10A
Rated Voltage	300V	—	300V

IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A

NOTES2:

1.Housing: PA66(UL94 V-0)

2.Solder Pin: Red copper(Sn Plated)

NOTES3:

1.Pitch: 5.0mm Poles: 02-24P

2.Operating temperature: -40℃~+105℃

3.RoHS Compliance

How to order

ULO-TB21 - 2R/5.0 - XXP - Y 0 0 0 A

Certificate
Series NO.Factory
Code

poles

Customer
requirements

color:

- 1:Grey 6:Red
2:Blue 7:transparent
3:Black 8:Yellow
4:Green 9:White
5:Orange

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.05.28	UNITS	MM
CHK.		DATE		SCALE	1: 1
APP.		DATE			
				NAME	ULO-TB21-2R/5.0-XXP-Y000A
				DWGNO.	ULOTB21Y000A

NINGBO ULO ELECTRONICS CO.,LTD.
宁波欧路电子有限公司

A	Total Pitch Tolerances in mm								Nominal dimension range in mm								⊥	≡	—		//					
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 30	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10		to 100	to 150	to 150	
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5			
6						5						4						3								